



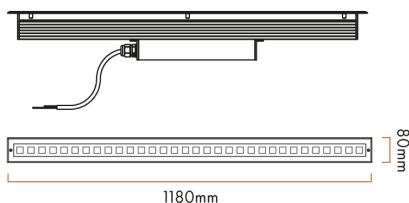

Linear floor-mounted recessed luminaire, walkable up to 500Kg. It is equipped with secondary optics for different light distributions, useful to achieve grazing effects on façades and architectural elements, or with acid-etched glass for diffused distribution combined with glare control which makes it suitable for footpaths. RGBW also available. Dali dimmable on request with extra charge.

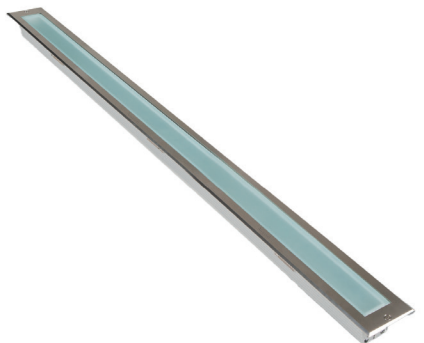

Fixture specifications

Assembly / Usage

Inground recessed

Protection

IP 67 - IK 09

Body

Extruded aluminium

Box

Stainless Steel SHEET AISI430F

Frame

Stainless Steel AISI316

Screen

Opal glass

Seals

Closed-cell EPDM rubber

Screws

Stainless steel A2

Sizes

H 83 x L 1180 x W 98

Electrical specifications

Power supply

220-240Vac 50/60Hz

Driver

Built-in

Driver current

500mA

Control

ON/OFF

Specific wiring

Included

Power module LED

24W

Absorbed power

26W

Source

LED

Source flux

3480 lm

Fixture source

1355 lm

Apparent efficiency

39 %

Insulation class

I

Overvoltage protection

2kV-4kV

Operating TA

50 °

Energetic class

A

CCT LED

3000K

CRI

80

Step MacAdam

3

Life time TM-21

L80B10 80000h Ta 25°C

Photobiological risk

RG1

Beam opening

Diffuse

Index

Index	Color	RAL
Standard	Steel	-

Acquastop System

AcquaStop System integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

Accessories

ULMOR683P/2V	Connector IP68 2Way/3Poles L 82 x Ø 28	ULE.TRA.580	Ultra compact type 2+3 hard wired surge protector L 37 x W 30 x H 30
ULMOR685P/3V	Connector Y IP68 3Ways/5Poles L 147 x W 73 x H 33		