




Rim, the latest addition to the Unolumen collection, is a small but performing recessed fixture with steel ring, proposed with diameters of 45 mm and 70 mm. The reduced sizes and the easy and quick installation allow its positioning in external and internal areas. In fact, Rim can be installed on floor, wall or ceiling, turning almost invisible, but insuring the created light and atmosphere to be the real main characters of the scene. The proposed beams are suitable for smooth or highlighted effects, for single or in-series installations. The ring of 316L stainless steel and the system AcquaStop for the anticondensation protection make Rim a safe and multipurpose product, ideal to give light to your fantasy.

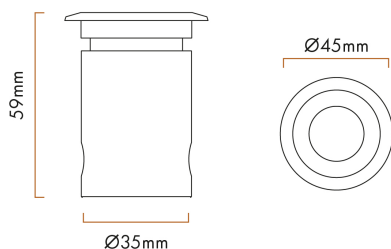

## Index

Index	Color	RAL
00	Pure white	9016
01	Black	9005
10	White	9010
24	Bronze	-
25	Rust	-
30	Anthracite	-
35	Slate grey	-
40	Grey	9006
55	Green cool mint	6019

## Fixture specifications

<b>Assembly / Usage</b> Inground or wall recessed	<b>Frame</b> Painted Steel AISI316L
<b>Protection</b> IP 67 - IK 08	<b>Screen</b> Transparent extra-clear glass 6mm
<b>Body</b> Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance	<b>Seals</b> Closed-cell EPDM rubber
<b>Box</b> Polypropylene (PP) 30% fiber UV Stabilized GWT750	<b>Paint / Finishing</b> Anti-corrosive UV stabilised polyester powder
	<b>Sizes</b> H 59 x Ø 45

## Electrical specifications

<b>Power supply</b> max 700mA DC	<b>Insulation class</b> III
<b>Driver</b> Remote Driver NOT INCLUDED	<b>Operating TA</b> -20°+ 50°
<b>Control</b> Remote DALI dimmable	<b>CCT LED</b> 3000K
<b>Absorbed power</b> 2W	<b>CRI</b> 80
<b>Source</b> LED	<b>Step MacAdam</b> 3
<b>Source flux</b> 300 lm	<b>Life time TM-21</b> L80B10 80000h Ta 25°C
<b>Fixture source</b> 230 lm	<b>Optic distribution</b> PMMA Lens
<b>Apparent efficiency</b> 77 %	<b>Beam opening</b> Oval/15°x60°

## AcquaStop System

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

## Accessories

ULD.BOX.030.01	Inground formwork H 100 x Ø 115	ULE.TRA.634.700	Driver 60W 700mA IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps
ULD.BOX.032.01	Short formwork H 80 x Ø 40	ULE.TRA.635.700	Driver 60W 700mA IP20 - DALI2 L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps
ULE.CAV.540.020	Cable H05RN-F L 2mt	ULE.TRA.636.700	Driver 60W 700mA IP20 - CASAMBI L 124 x W 80 x H 22 - 1 Driver for 1-20 Lamps
ULE.CAV.540.050	Cable H05RN-F L 5 mt	ULE.TRA.553.700	Driver 20W 700mA IP67 - ON/OFF L 120 x W 38 x H 25 - 1 Driver for 1-8 Lamps
ULE.CAV.540.100	Cable H05RN-F L 10mt	ULE.TRA.584.700	Driver 30W 700mA IP68 - DALI2 L 121 x W 53 x H 26 - 1 Driver for 1-14 Lamps
ULMOR682P/2V	Connector IP68 2Ways/2Poles L 72 x Ø 22	ULHUB.700.001.ND	Hub 700mA IP66 - ON/OFF with driver 60W IP20 L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps
ULE.TRA.621.700	Driver 20W 700mA IP20 - ON/OFF L 111 x W 52 x H 22 - 1 Driver for 1-8 Lamps	ULHUB.700.001.DA2	Hub 700mA IP66 - DALI-2 with driver 60W IP20 L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps
ULE.TRA.623.700	Driver 36W 700mA IP20 - ON/OFF L 163 x W 30 x H 21 - 1 Driver for 1-14 Lamps	ULHUB.700.001.CA	Hub 700mA IP66 - CASAMBI with driver 60W IP20 L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps