




Rim, the latest addition to the Unolumen collection, is a small but performing recessed fixture with steel ring, proposed with diameters of 45 mm and 70 mm. The reduced sizes and the easy and quick installation allow its positioning in external and internal areas. In fact, Rim can be installed on floor, wall or ceiling, turning almost invisible, but insuring the created light and atmosphere to be the real main characters of the scene. The proposed beams are suitable for smooth or highlighted effects, for single or in-series installations. The ring of 316L stainless steel and the system AquaStop for the anticondensation protection make Rim a safe and multipurpose product, ideal to give light to your fantasy.

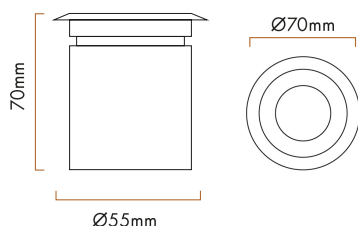

## Fixture specifications

### Assembly / Usage

Inground or wall recessed

### Protection

IP 67 – IK 08

### Body

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

### Box

Polypropylene (PP) 30% fiber UV Stabilized GWT750

### Frame

Stainless Steel AISI316L

### Screen

Transparent extra-clear glass 8mm

### Seals

Closed-cell EPDM rubber

### Sizes

H 70 x Ø 70

## Electrical specifications

### Power supply

max 500mA

### Driver

Remote Driver NOT INCLUDED

### Control

Remote DALI dimmable

### Absorbed power

6W

### Source

LED

### Source flux

690 lm

### Fixture source

505 lm

### Apparent efficiency

73 %

### Insulation class

III

### Operating TA

-20°+ 50°

### CCT LED

3000K

### CRI

80

### Step MacAdam

3

### Life time TM-21

L80B10 80000h Ta 25°C

### Optic distribution

PMMA Lens

### Beam opening

Wide Flood/36°

## Index

| Index    | Color | RAL |
|----------|-------|-----|
| Standard | Steel | -   |

## Acquastop System

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

### Accessories

|                 |  |                   |   |
|-----------------|--|-------------------|---|
| ULA.BOX.019.01  | Inground formwork<br>H 110 x Ø 135   | ULE.TRA.634.500   | Driver 60W 500mA IP20 – ON/OFF<br>L 124 x W 80 x H 22 – 1 Driver for 1-5 Lamps              |
| ULD.BOX.033.01  | Short formwork<br>H 100 x Ø 60   | ULE.TRA.635.500   | Driver 60W 500mA IP20 – DALI2<br>L 124 x W 80 x H 22 – 1 Driver for 1-5 Lamps               |
| ULE.CAV.540.020 | Cable H05RN-F<br>L 2mt   | ULE.TRA.636.500   | Driver 60W 500mA IP20 – CASAMBI<br>L 124 x W 80 x H 22 – 1 Driver for 1-5 Lamps             |
| ULE.CAV.540.050 | Cable H05RN-F<br>L 5 mt  | ULE.TRA.553.500   | Driver 20W 500mA IP67 – ON/OFF<br>L 120 x W 38 x H 25 – 1 Driver for 1-3 Lamps              |
| ULE.CAV.540.100 | Cable H05RN-F<br>L 10mt  | ULE.TRA.584.500   | Driver 30W 500mA IP68 – DALI2<br>L 121 x W 53 x H 26 – 1 Driver for 1-3 Lamps               |
| ULMOR682P/2V    | Connector IP68 2Ways/2Poles<br>L 72 x Ø 22                                     | ULHUB.500.001.ND  | Hub 500mA IP66 – ON/OFF with driver 60W IP20<br>L 235 x W 200 x H 92 – 1 Hub for 1-5 Lamps  |
| ULE.TRA.621.500 | Driver 20W 500mA IP20 – ON/OFF<br>L 111 x W 52 x H 22 – 1 Driver for 1-3 Lamps | ULHUB.500.001.DA2 | Hub 500mA IP66 – DALI-2 with driver 60W IP20<br>L 235 x W 200 x H 92 – 1 Hub for 1-5 Lamps  |
| ULE.TRA.623.500 | Driver 36W 500mA IP20 – ON/OFF<br>L 163 x W 30 x H 21 – 1 Driver for 1-4 Lamps | ULHUB.500.001.CA  | Hub 500mA IP66 – CASAMBI with driver 60W IP20<br>L 235 x W 200 x H 92 – 1 Hub for 1-5 Lamps |