




Zeus 70 is the new line of steplight with grazing light born to create suggestive light and shadow effects, available in diameters of 45 mm and 70 mm. Design to give life to residential and public walk ways, also available with dedicated wall and ceiling version , making itself almost invisible but keeping light and atmosphere created the main characters of the scene. With one, two or four slots , Zeus 70 becomes a perfect fixture for soft or strong effects, for single or series installations. IP67 degree protection combined with AcquaStop system for anti-condensation protection make Zeus 70 a reliable and safe product, to inspire light emotions.

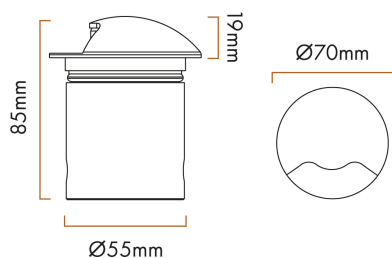

## Index

Index	Color	RAL
00	Pure white	9016
01	Black	9005
10	White	9010
24	Bronze	-
25	Rust	-
30	Anthracite	-
35	Slate grey	-
40	Grey	9006
55	Green cool mint	6019

## Fixture specifications

<b>Assembly / Usage</b> Inground or wall recessed	<b>Screen</b> Transparent Polycarbonate
<b>Protection</b> IP 67 - IK 08	<b>Seals</b> Closed-cell EPDM rubber
<b>Body</b> Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance	<b>Paint /finishing</b> Anti-corrosive UV stabilised polyester powder
<b>Box</b> Polypropylene (PP) 30% fiber UV Stabilized GWT750	<b>Sizes</b> H 85 x Ø 70

## Electrical specifications

<b>Power supply</b> 24Vdc	<b>Apparent efficiency</b> 6 %
<b>Driver</b> Remote Driver NOT INCLUDED	<b>Insulation class</b> III
<b>Driver current</b> 24Vdc	<b>Operating TA</b> -20°+ 50°
<b>Control</b> ON/OFF	<b>CCT LED</b> 2700K
<b>Absorbed power</b> 6W	<b>CRI</b> 80
<b>Source</b> LED	<b>Step MacAdam</b> 3
<b>Source flux</b> 690 lm	<b>Optic distribution</b> PMMA Lens
<b>Fixture source</b> 41 lm	<b>Beam opening</b> Diffused 1 window

## Acquastop System

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

### Accessories

ULA.BOX.019.01	Inground formwork H 110 x Ø 135
ULD.BOX.033.01	Short formwork H 100 x Ø 60
ULE.CAV.540.020	Cable H05RN-F L 2mt
ULE.CAV.540.050	Cable H05RN-F L 5 mt
ULE.CAV.540.100	Cable H05RN-F L 10mt

ULMOR682P/2V	Connector IP68 2Ways/2Poles L 72 x Ø 22
ULE.TRA.631	Driver 15W 24Vdc IP20 - ON/OFF L 106 x W 33 x H 22 - 1 Driver for 1-2 Lamps
ULE.TRA.632	Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-10 Lamps
ULE.TRA.577	Driver 25W 24Vdc IP67 - ON/OFF L 14 8x W 40 x H 32 - 1 Driver for 1-3 Lamps
ULE.TRA.579	Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 4-14 Lamps
ULHUB.24V.001.ND	Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps