



## Type of luminaire

### Type of luminare

Compact and seamless

## General information

### Material

Sheet steel

### Mounting Method

Recessed

### Type of light source

LED

### Light control

On/off

### Luminaire dimension (mm)

L1195 x W295 x H50

## Technical data

### LED mode

SMD 2835

### System power

25W

### System efficiency

120 lm/W

### Rated luminous flux

3060lm

### Color temperature

5000K

### SDCM

<3

### Unified Glare Rating (UGR)

<19

### Beam angle

36°

### Color Rendering Index (CRI)

≥80

### Driver

External

### Control

on/off

### Power factor

>0.9

### Rated life at 25°C

L80/B20

### Total Harmonic Distortion (THD)

<15%

### Ambient temperature (Ta)

25°C

### Max. ambient temperature

40°C

### Operating voltage


220-240V AC

### Ingress Protection rating (IP)

IP20

### Conformity mark

CE, RoHS

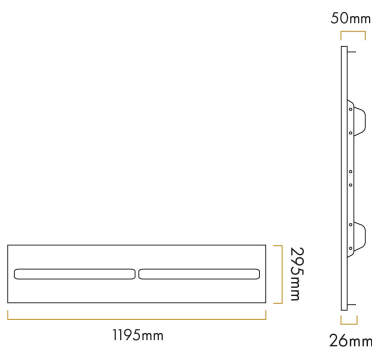

## Index

Index	Color	RAL
Standard	white	9016

### Accessories and options

ULPLOS2550OPB-SM	Surface Mount Kit	ULPLOS2550OPB-DALI	Dali dimming
ULPLOS2550OPB-PM	Pendant Mount Kit	ULPLOS2550OPB-PUSH	Push dimming
		ULPLOS2550PRB	Prismatic diffuser

↓ Installation manual

↓ Photometric IES files

↓ Photometri LDT files