

Type of luminaire

Type of luminaire
Compact and seamless

General information

Material
Aluminium

Mounting Method
Recessed

Type of light source
LED

Light control
Non-dimmable, on/off

Luminaire dimension (mm)
L595 x W595 x H32

Technical data

LED mode
SMD 2835

System power
30W

System efficiency
120 lm/W

Rated luminous flux
3600lm

Color temperature
3000K

SDCM
<5

Unified Glare Rating (UGR)
<19

Beam angle
120°

Color Rendering Index (CRI)
>80

Driver
Remote emergency pack

Control
Non-dimmable

Power factor
>0.95

Rated life at 25°C
L80/B10

Total Harmonic Distortion (THD)
<15%

Ambient temperature (Ta)
25°C

Max. ambient temperature
35°C

Operating voltage
220-240V AC

Ingress Protection rating (IP)
IP44

Conformity mark
CE, RoHS



Accessories and options

| | |
|-----------------|---------------|
| ULPLSO30xx-110 | 1-10V Dimming |
| ULPLSO30xx | On/off |
| ULPLSO30xx-DALI | DALI Dimmable |

xx - Selection of color temperature

Index

| Index | Color | RAL |
|----------|-------|------|
| Standard | white | 9016 |

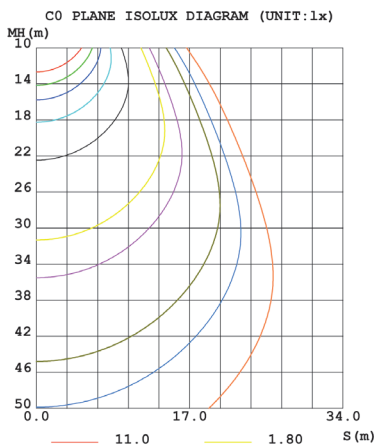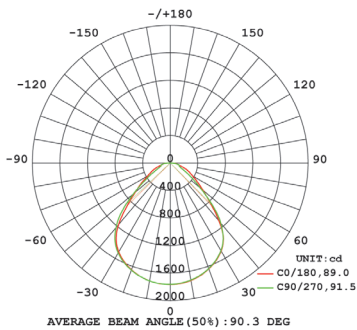

Manual

Photometric IES files

Photometri LDT files