

Type of luminaire

Type of luminaire
Compact and seamless

General information

Material
Aluminium

Mounting Method
Recessed

Type of light source
LED

Light control
Non-dimmable, on/off

Luminaire dimension (mm)
L595 x W595 x H32

Technical data

LED mode SMD 2835	Control Dimmable
System power 30W	Power factor >0.95
System efficiency 120 lm/W	Rated life at 25°C L80/B10
Rated luminous flux 3600lm	Total Harmonic Distortion (THD) <15%
Color temperature 6000K	Ambient temperature (Ta) 25°C
SDCM <5	Max. ambient temperature 35°C
Unified Glare Rating (UGR) <19	Operating voltage 220-240V AC
Beam angle 120°	Ingress Protection rating (IP) IP44
Color Rendering Index (CRI) >80	Conformity mark CE, RoHS
Driver DALI	



Accessories and options

ULPLSO30xx-110	1-10V Dimming
ULPLSO30xx-EM	Remote emergency pack
ULPLSO30xx	On/off

xx - Selection of color temperature

Index

Index	Color	RAL
Standard	white	9016

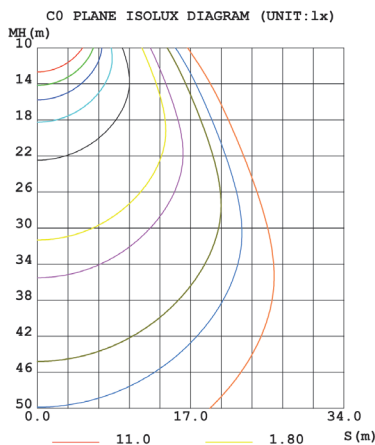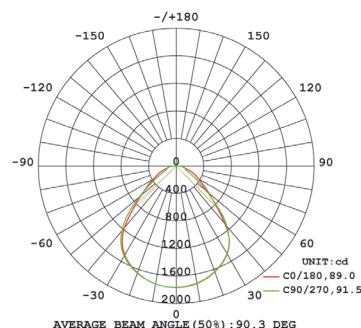

Manual	Photometric IES files	Photometri LDT files
------------------------	---------------------------------------	--------------------------------------