




Rim, the latest addition to the Unolumen collection, is a small but performing recessed fixture with steel ring, proposed with diameters of 45 mm and 70 mm. The reduced sizes and the easy and quick installation allow its positioning in external and internal areas. In fact, Rim can be installed on floor, wall or ceiling, turning almost invisible, but insuring the created light and atmosphere to be the real main characters of the scene. The proposed beams are suitable for smooth or highlighted effects, for single or in-series installations. The ring of 316L stainless steel and the system AcquaStop for the anticondensation protection make Rim a safe and multipurpose product, ideal to give light to your fantasy.

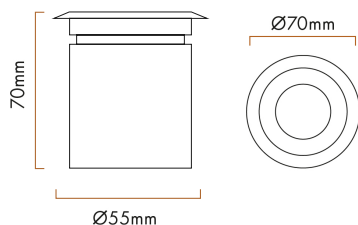

## Index

Index	Color	RAL
00	Pure white	9016
01	Black	9005
10	White	9010
24	Bronze	-
25	Rust	-
30	Anthracite	-
35	Slate grey	-
40	Grey	9006
55	Green cool mint	6019

## Fixture specifications

### Assembly / Usage

Inground or wall recessed

### Protection

IP 67 – IK 08

### Body

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

### Box

Polypropylene (PP)30% fiber UVStabilized  
GWT750

### Frame

Painted Steel AISI316L

### Screen

Transparent extra-clear glass 8mm

### Seals

Closed-cell EPDM rubber

### Paint / Finishing

Anti-corrosive UV stabilised polyester powder

### Sizes

H 70 x Ø 70

## Electrical specifications

### Power supply

max 500mA

### Driver

Remote Driver NOT INCLUDED

### Control

Remote DALI dimmable

### Absorbed power

6W

### Source

LED

### Source flux

690 lm

### Fixture source

520 lm

### Apparent efficiency

75 %

### Insulation class

III

### Operating TA

-20°+ 50°

### CCT LED

2700K

### CRI

80

### Step MacAdam

3

### Life time TM-21

L80B10 80000h Ta 25°C

### Optic distribution

PMMA Lens

### Beam opening

Spot/10°

## AcquaStop System

AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

## Accessories

ULA.BOX.019.01	Inground formwork H 110 x Ø 135	ULE.TRA.634.500	Driver 60W 500mA IP20 – ON/OFF L 124 x W 80 x H 22 – 1 Driver for 1-5 Lamps
ULD.BOX.033.01	Short formwork H 100 x Ø 60	ULE.TRA.635.500	Driver 60W 500mA IP20 – DALI2 L 124 x W 80 x H 22 – 1 Driver for 1-5 Lamps
ULE.CAV.540.020	Cable H05RN-F L 2mt	ULE.TRA.636.500	Driver 60W 500mA IP20 – CASAMBI L 124 x W 80 x H 22 – 1 Driver for 1-5 Lamps
ULE.CAV.540.050	Cable H05RN-F L 5 mt	ULE.TRA.553.500	Driver 20W 500mA IP67 – ON/OFF L 120 x W 38 x H 25 – 1 Driver for 1-3 Lamps
ULE.CAV.540.100	Cable H05RN-F L 10mt	ULE.TRA.584.500	Driver 30W 500mA IP68 – DALI2 L 121 x W 53 x H 26 – 1 Driver for 1-3 Lamps
ULMOR682P/2V	Connector IP68 2Ways/2Poles L 72 x Ø 22	ULHUB.500.001.ND	Hub 500mA IP66 – ON/OFF with driver 60W IP20 L 235 x W 200 x H 92 – 1 Hub for 1-5 Lamps
ULE.TRA.621.500	Driver 20W 500mA IP20 – ON/OFF L 111 x W 52 x H 22 – 1 Driver for 1-3 Lamps	ULHUB.500.001.DA2	Hub 500mA IP66 – DALI-2 with driver 60W IP20 L 235 x W 200 x H 92 – 1 Hub for 1-5 Lamps
ULE.TRA.623.500	Driver 36W 500mA IP20 – ON/OFF L 163 x W 30 x H 21 – 1 Driver for 1-4 Lamps	ULHUB.500.001.CA	Hub 500mA IP66 – CASAMBI with driver 60W IP20 L 235 x W 200 x H 92 – 1 Hub for 1-5 Lamps